

# Brandisolering av ventilationskanaler

ROCKWOOL typgodkännande 0108/02


Brand-klass	Kanaltyp	Värme-matta	Brandmatta Vent	ProRox WM957	Alu-Brand BATTs 80	Alu-Brand BATTs 120	Alu-Brand BATTs 140
EI 15	Cirkulär Rektangulär	70 mm 100 mm	30 mm -	- 40 mm	- 60 mm	- -	- -
EI 30	Cirkulär Rektangulär	110 mm 140 mm	55 mm -	- 60 mm	- -	- 60 mm	- -
EI 60	Cirkulär Rektangulär	- -	80 mm -	- 90 mm	- -	- -	- 60 mm
EI 120	Cirkulär	-	120 mm	-	-	-	-



ROCKWOOL AB 036-570 52 00 [www.rockwool.se](http://www.rockwool.se)

## Utrymme för montering och isolering

Kanalmått inkl. isolering $d$ mm	$f_a$ mm	$f_a$ mm
$\geq 160$	$\geq 100$	$\geq 50$
$> 160 \geq 300$	$\geq 200$	$\geq 100$
$> 300 \geq 300$	$\geq 300$	$\geq 100$
$> 500 \geq 300$	$\geq 400$	$\geq 100$
$> 800 \geq 300$	$\geq 500$	$\geq 150$
$> 1200$	$\geq 500$	$\geq 150$

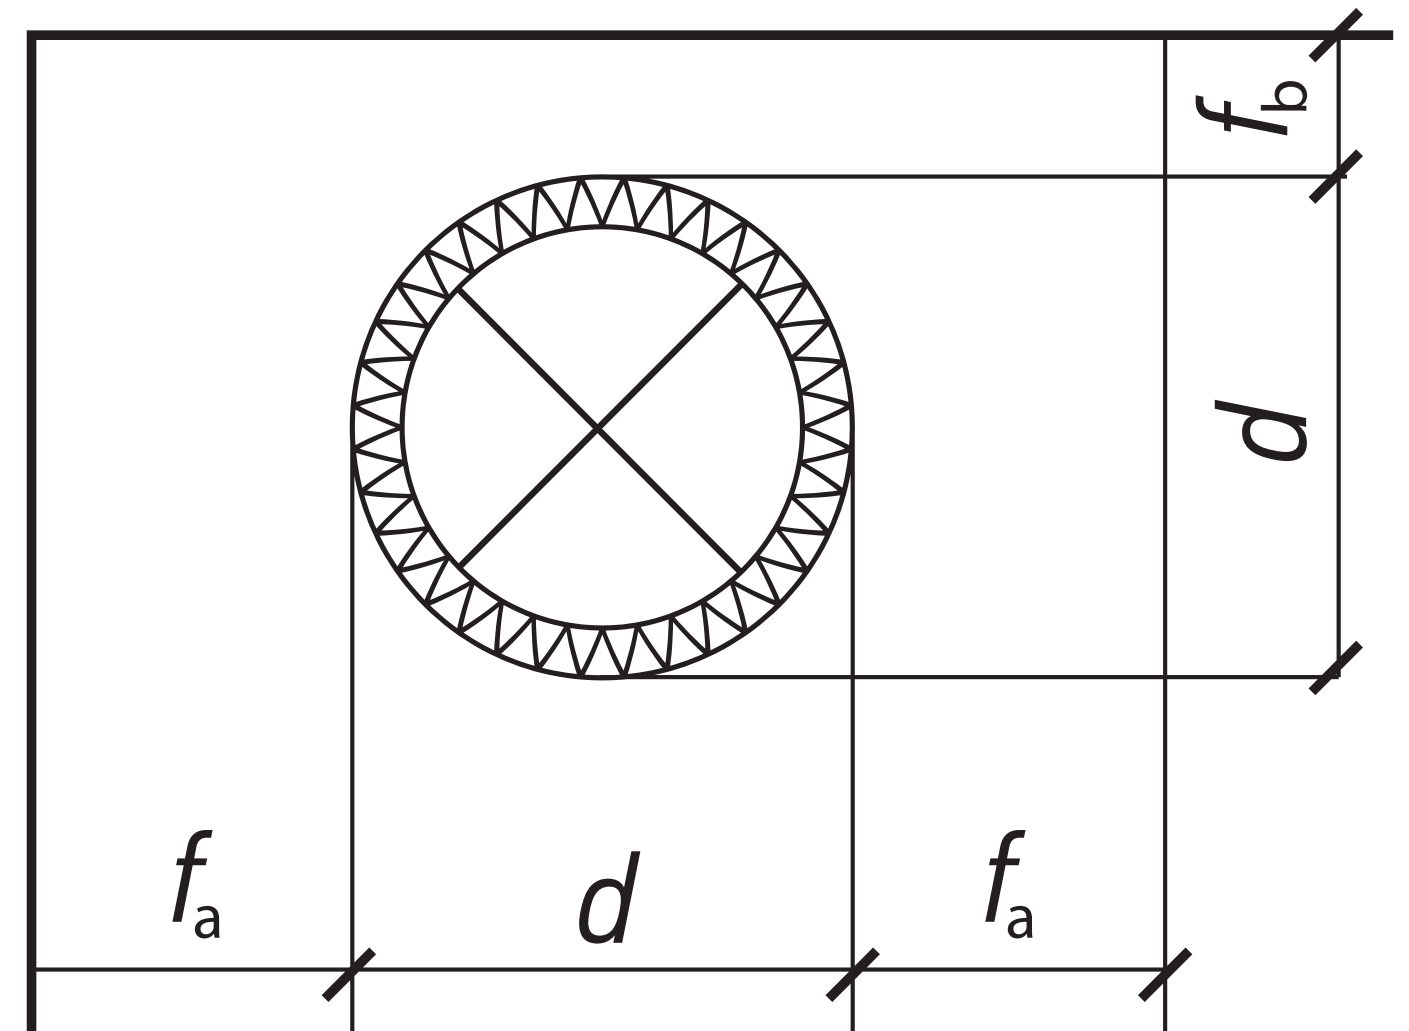

OBS!  $d$  anger här  
kanalmåttet inklusive isolering.  
Källa SS 91 03 10